



# SNUGLITE™ ECO i-SIZE R129









enhanced child restraint










**IMPORTANT! KEEP FOR FUTURE REFERENCE.**









**EN**


Owner's Manual  
Parts List  
Fitting Guide

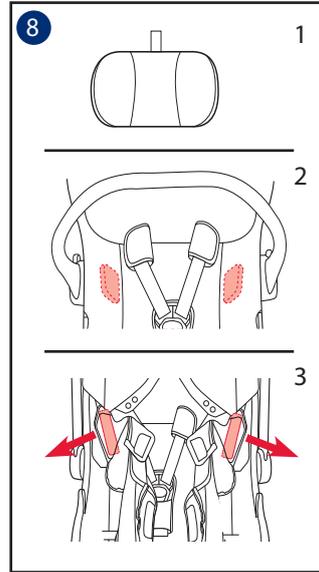

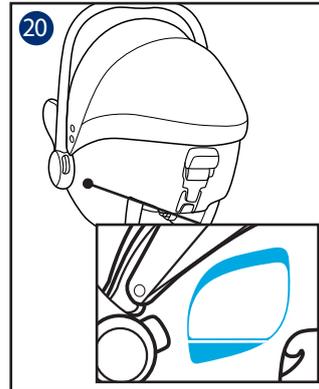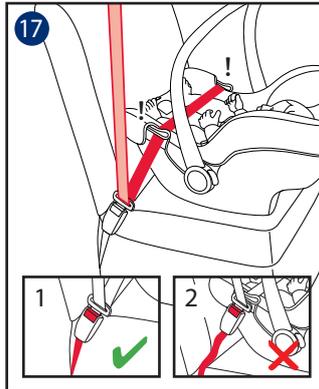





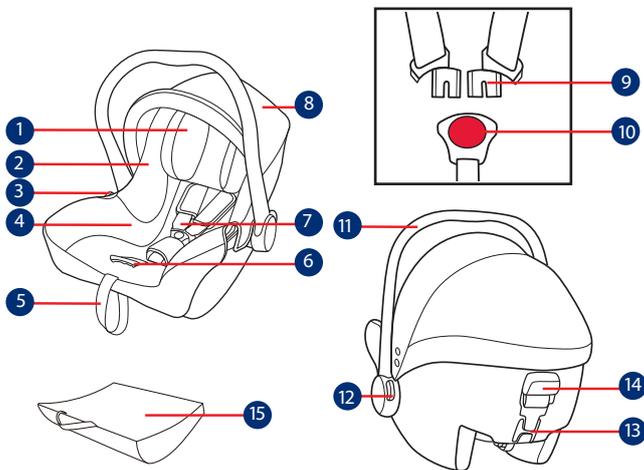

- 1 Head Support
- 2 Seat Pad
- 3 Side Guide
- 4 Instructional Manual (under Seat Covers)
- 5 Adjustment Webbing
- 6 Harness Adjustment Button
- 7 Shoulder Harness
- 8 Canopy
- 9 Harness Connectors
- 10 Harness Buckle
- 11 Handle
- 12 Handle Button
- 13 Rear Guide
- 14 Stroller Fix Release Button
- 15 Infant Insert

## EN IMPORTANT

READ THESE INSTRUCTIONS CAREFULLY BEFORE USE AND KEEP THEM FOR FUTURE REFERENCE. YOUR CHILD'S SAFETY MAY BE AFFECTED IF YOU DO NOT FOLLOW THESE INSTRUCTIONS.

**⚠️WARNING:**  
**IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY.**

BE cautious that the rigid items and plastic parts of the enhanced child restraint system shall be so located and installed that they are not liable to become trapped by a movable seat or in the door of the vehicle.

DO NOT use the rearward facing enhanced child restraint systems in seating positions where there is an active frontal airbag installed.

To use this enhanced child restraint with base according to the UN Regulation No.129, your child must meet the following requirements. Child height 40cm-75cm/ Child weight ≤13kg.

To use this infant carrier module with vehicle belt, your child must meet the following requirements. Child height 40cm-75cm/ Child weight ≤13kg.

Any straps holding the enhanced child restraint to the vehicle should be tight. that any support-legs should

be in contact with the vehicle floor, that any straps or impact shields restraining the child should be adjusted to the child's body, and that straps should not be twisted.

DO NOT use any load bearing contact points other than those described in the instructions and marked on the enhanced child restraint.

After your child is placed in this enhanced child restraint, the safety belt must be used correctly.

This enhanced child restraint should be replaced when it has been subject to violent stresses in an accident. An accident can cause damage to it that you cannot see.

Consider the danger of making any alterations or additions to the device without approval of the adequate authority, and the danger of not following closely to the installation instructions provided by the enhanced child restraint manufacturer.

Please keep this enhanced child restraint away from sunlight, otherwise it may be too hot for child's skin. Always touch the enhanced child restraint before placing child in it.

DO NOT leave your child unattended in the enhanced child restraint system.

Any luggage or other objects liable to cause injuries in the event of a collision shall be properly secured.

The enhanced child restraint system shall NOT BE USED without the soft goods.

The soft goods should not be replaced with any other than the one recommended by the manufacturer, because the soft goods constitutes an integral part of the restraint performance.

Please check if this enhanced child restraint can be installed properly in your vehicle before you purchase it.

NO enhanced child restraint can guarantee full protection from injury in an accident. However, proper use of this enhanced child restraint will reduce the risk of serious injury or death to your child.

DO NOT install this enhanced child restraint without following the instructions in this manual or you may put your child at serious risk of injury or death.

DO NOT use this enhanced child restraint if it has damaged or missing parts.

The instructions can be retained on the child restraint for its life period.

For an "i-Size Enhanced Child Restraint System", the user shall also be referred to the vehicle manufacturer's handbook.

## Product Information

On the base with the i-Size ISOFIX connections (Infant carrier module is compatible withXXXX™)

1.This is an "i-Size" Enhanced Child Restraint System. It is approved according to UN Regulation No.129, for use in, i-Size compatible vehicle seating positions as indicated by vehicle manufacturers in the vehicle users' manual.

2.If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer.

Infant carrier module can be used separately.

1.This is Universal Belted Enhanced Child Restraint System. It is approved according to UN Regulation No.129, for use primarily in "Universal seating positions" as indicated by vehicle manufacturers in the vehicle user's manual.

2.If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer.

Please refer to the base instruction manual for using base.

**Materials** Plastics, Metal, Fabrics

**Patent No.** Patents pending

## Installation Concerns

See images 1 - 4

! DO NOT install this infant carrier module on vehicle seats with Lap Belts. 1

! This infant carrier module is suitable for vehicle seats with a 3-point Retractor Safety Belt only. 2

## Handle Adjustment

See images 5 - 6

The handle of the infant carrier module can be adjusted to 3 positions. 5

! Position 1- Position for car, hand or stroller transportation.

To adjust the handle, squeeze the handle buttons on both sides to release it 6 -1, and then rotate the handle until it clicks into any of the 3 positions. 6 -2

## Use Shoulder Harnesses

See image 7

Check that shoulder harness straps are set at the proper height.

! No matter where the head support is, the bottom of head

support must be level with the highest point of child's shoulder, it is shown as 7

! If the shoulder harness straps are not at proper height, the child might be ejected from the enhanced child restraint if there is a crash.

## Securing Child in the Enhanced Child Restraint

See images 8 - 16

Always use the head support when the baby sitting in the infant carrier module. 8 -1

We recommend using the cushion to increase side impact protection while the baby is under 60cm, 8 -2 and removing the cushion when the infant's shoulders no longer fit comfortably. 8 -3

While pressing the harness adjustment button, pull completely the two shoulder harnesses of the enhanced child restraint. 9

Unlock the buckle of the harnesses by pressing the red button. 10

Detaching the bottom of soft goods as 11

Place infant insert on the infant carrier module and tuck crotch

strap into elastic loop. **12**

We recommend using the infant

- ! insert while the baby is under 60cm and can be used until they outgrow the infant insert.

Re-assemble the soft goods as **13**

Place child into the infant carrier module and lock the buckle. **14 15**

Tighten the shoulder harnesses by pulling adjustment webbing. **16**

## Installation without base

See images **17 - 21**

Place the infant carrier module onto the vehicle seat where you wish to put it. Pull the vehicle safety belt out and lock it into the vehicle buckle, sliding the vehicle lap belt into the side guides of the infant carrier module. **17**

- ! The infant carrier module can not be used if the vehicle safety belt buckle (female buckle end) is too long to anchor the infant carrier module securely. **17 -2**

Slide diagonal belt into the rear guide. **18**

Pull the vehicle shoulder belt to fasten the infant carrier module tightly and securely. **19**

Level line on infant carrier module must be level to the ground when

the infant carrier module is installed.

- 20** ! Tension the vehicle safety belt as much as possible, checking that it is not loose or twisted.

After installing the infant carrier module, always check that the vehicle belts are routed correctly and securely fastened into the vehicle buckle. **21**

## Detaching Canopy and Seat Pad

See images **22 - 29**

To re-assemble the soft goods, reverse the aforementioned steps.

## Care and Maintenance

Please wash the soft goods with cold water under 30°C.

Do not iron the soft goods.

Do not bleach or dry clean the soft goods.

Do not use undiluted detergents, gasoline or other organic solvent to wash the child restraint. It may cause damage to the child restraint.

Do not wring out the seat cover and inner padding to dry. It may leave the seat cover and inner padding with wrinkles.

Please hang dry the seat cover and inner padding in the shade.

Please remove the child restraint from the vehicle seat if not in use for a long period of time. Put the child restraint in a cool, dry place where your child cannot access it.

Do not tamper with the harness connectors during cleaning.

**gracobaby.eu**

**www.gracobaby.pl**



**Allison Baby UK Ltd**

Venture Point, Towers Business Park Rugeley,  
Staffordshire, WS15 1UZ

**NUNA International B.V.**

Van der Valk Boumanweg 178 C,  
2352 JD Leiderdorp, The Netherlands

**Customer Service**

[gracobaby.eu](http://gracobaby.eu)  
[www.gracobaby.pl](http://www.gracobaby.pl)